

08/31/00
10923 U.S. PTO

09-01-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

NCR Corporation Docket No. 8490.00

Assistant Commissioner for Patents
Washington, D.C. 20231

AUG 31 2000

10936 U.S. PTO
09/651979
08/31/00

Sir:

Transmitted herewith for filing is the patent application of Inventor(s): **Adrian Shields**

For: **PORTABLE TERMINAL**

Enclosed are also:

- ☒ 4 Sheet(s) of Drawings
- ☒ An assignment of the invention to NCR Corporation
- ☐ A certified copy of an application

CLAIMS AS FILED

FOR	Number Filed		Number Extra		Rate		Basic Fee (\$690)
Total Claims	11	-20 =	0	X	\$ 18	=	\$ 0
Independent Claims	5	-3 =	2	X	\$ 78	=	\$ 156
Multiple Dependent Claims	0			X	\$260	=	\$ 0
Total Filing Fee =							\$ 846


☒ Please charge the above filing fee to the account of NCR Corporation, Deposit Account No. 14-0225.

Please have all communications concerning this application and the recorded Assignment directed to:

Michael Chan
Intellectual Property Section
Law Department
NCR Corporation
101 West Schantz, ECD-2
Dayton, Ohio 45479-0001

Our telephone number is: 937-445-4956

Respectfully,


Attorney for: **Adrian Shields**

CERTIFICATE OF MAILING
"EXPRESS MAIL"

"Express Mail"
Mailing Label Number EH 970 870 082 US

Date of Deposit AUG 31 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" Service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Shirley Doll
(type or print name of person certifying)


Signature

APPLICATION FOR LETTERS PATENT OF THE UNITED STATES


CERTIFICATE OF MAILING
"EXPRESS MAIL"

"Express Mail"
Mailing Label Number EH 970 870 082 US

Date of Deposit AUG 31 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" Service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Shirley Doll
(type or print name of person certifying)


Signature

SPECIFICATION

To all whom it may concern:

Be It Known, That I, **Adrian Shields**, of Fife, United Kingdom, have invented certain new and useful improvements in **PORTABLE TERMINAL**, of which I declare the following to be a full, clear and exact description:

PORTABLE TERMINAL

Background Of The Invention

The present invention relates to a portable terminal. In particular, the invention
5 relates to a portable terminal for encrypting information and to a method of encrypting
information in a portable terminal, such as a personal digital assistant (PDA).

PDA's are used for storing personal information and for transferring stored personal
information between computer systems. It is also possible to use a PDA to prepare and store
highly confidential personal information such as transaction information for execution at a
10 self-service terminal (SST) such as an automated teller machine (ATM).

To provide some security for the transaction information it would be desirable to
encrypt the transaction information that is stored on and transmitted from the PDA.
However, a conventional PDA is not an inherently secure device; it has minimal tamper
resistance, which means that there is no secure area for storing a secret cryptographic key.
15 The lack of secure storage means that industry-standard cryptographic techniques cannot be
used with a conventional PDA.

Summary of the Invention

According to a first aspect of the invention there is provided a portable terminal for
20 encrypting information characterized in that the terminal generates a new key for each
transaction, where the new key is generated using one or more properties of the portable
terminal.

It will be appreciated that the one or more properties of the portable terminal are
properties that vary with usage of the terminal or with time; that is, the properties are
25 variable. This ensures that the new key is unique and unpredictable.

The new key is generated from an unsecure area of memory. Thus, no dedicated
security module is required.

09651979-033100

The new key may be generated when the transaction is prepared; that is, when the new transaction is entered into the portable terminal. Alternatively, and more preferably, the new key is generated when the transaction is executed; that is, immediately prior to communicating the new transaction from the portable terminal to a self-service terminal.

5 Preferably, the new key is a symmetric key. Using a symmetric key provides improved performance and ensures compatibility with existing financial systems that generally use symmetric key technology.

10 A user may enter an identification during preparation of a transaction. Alternatively, the user may enter an identification a short period of time prior to executing the transaction; that is, a short period of time, such as ten seconds, prior to communicating the transaction from the portable terminal to an SST. The identification may be a PIN (personal identification number), or it may be biometrics-based.

15 Preferably, the one or more properties of the portable terminal include the history of usage of the terminal and/or the date and time settings. The history of usage may include: button selections, pointer movements, data entered, and such like. In some terminals, these properties are stored in system memory. Thus, the system memory is used as the seed (the starting value used by a pseudo-random number generating routine) from which the new key is generated. As the system memory changes with each keystroke, a unique key is generated for each transaction.

20 Preferably, the portable terminal generates a unique challenge in addition to the new key so that a unique challenge can be issued for each transaction.

 Preferably, the new key and the unique challenge are encrypted using a public key issued by a host.

25 By virtue of this aspect of the invention a portable terminal uses unpredictable data to generate a new key for each transaction. This new key can be used in association with a public key issued by an ATM owner to provide a secure communications channel between the portable terminal and the ATM. One advantage of this aspect of the invention is that no assumptions are made regarding protected storage areas within the portable terminal.

0951979-033100

The portable terminal may be a PDA. Alternatively, the portable terminal may be a portable computer such as a laptop computer, or the terminal may be a portable communication device such as a cellular telephone.

According to a second aspect of the invention there is provided a method of
5 encrypting information in a portable terminal, the method being characterized by the steps of:
using one or more properties of the portable terminal to obtain a sequence of values, and
generating a new key based on the sequence of values.

Preferably, the method includes the further step of generating a unique challenge
value based on the sequence of values.

10 Preferably, the method includes the further steps of encrypting the new key and the
challenge value using a public key issued by a host, and transmitting the encrypted new key
and challenge value to the host.

Preferably, the step of generating a new key based on the sequence of values uses
standard cryptographic techniques, such as generating a hash value of the sequence of values
15 using MD4, or MD5, or SHA-1, or such like hashing algorithm. A typical hashing algorithm
(such as MD5) generally takes a sequence of values and converts it into a fixed string of
digits.

In one embodiment the hash value is split into two halves, left and right. The right
half being used as an intermediate key to encrypt the left half, which, after encryption,
20 becomes the new key. The original left half being used as an intermediate key to encrypt the
original right half, which, after encryption, becomes the challenge value. It will be
appreciated that splitting the hash value into a left and a right component is just one
convenient method of generating a new key and a challenge value.

According to a third aspect of the invention there is provided a method of
25 communicating encrypted information between a portable terminal and a self-service
terminal, the method being characterized by the steps of: using one or more properties of the
portable terminal to obtain a sequence of values, generating a new key based on the sequence
of values, generating a challenge value based on the sequence of values, encrypting the new

key and the challenge value using a public key, and transmitting the encrypted key and challenge value to the self-service terminal.

Preferably, the method further comprises the steps of the SST: generating a new challenge value, encrypting the generated challenge value using the new key, transmitting the encrypted challenge value to the portable terminal, and awaiting a correct response to the transmitted challenge value being transmitted by the portable terminal before accepting any subsequent transaction.

As a unique challenge is issued by the portable terminal and also by the self-service terminal, replay attacks (whereby a third party intercepts, records, and attempts to repeat a transmission from a portable terminal to an SST) can be avoided because the third party will not be able to respond correctly to the new challenge issued by the SST. This is because a third party does not know the new key so the third party cannot decrypt the challenge value issued by the SST.

According to a fourth aspect of the invention there is provided a transaction system comprising a self-service terminal and a portable terminal characterized in that the portable terminal is operable to use one or more properties of the portable terminal for obtaining a sequence of values, and to generate a new key based on this sequence of values, and the portable terminal and the self-service terminal are adapted for intercommunicating using the new key.

According to a fifth aspect of the invention there is provided a method of conducting a transaction at a self-service terminal, the method comprising the steps of: using a portable terminal to prepare an incomplete transaction, conveying the portable terminal to the self-service terminal, completing the incomplete transaction, and executing the completed transaction by the portable terminal generating a new encryption key for that transaction using one or more properties of the portable terminal.

The step of completing the transaction may comprise the step of a user entering an identifier. The identifier may be a PIN.

By virtue of this aspect of the invention, the incomplete transaction does not include the user's identifier so that if the incomplete transaction is copied or read by a third party the user's identifier will not be disclosed.

According to a sixth aspect of the invention there is provided a method of
5 determining if a self-service terminal is an authentic terminal, the method comprising the steps of: using one or more properties of a portable terminal to obtain a sequence of values, generating a new key based on the sequence of values, generating a challenge value based on the sequence of values, encrypting the new key and challenge value using a public key provided by an institution, transmitting the encrypted key and challenge to the self-service
10 terminal, receiving a response from the self-service terminal, decrypting the response using the new key, and halting any further transmission unless the decrypted response includes a correct reply to the challenge value.

It will be appreciated that this invention has particular advantages when associated with portable terminals that do not have secure storage areas for storing one or more
15 encryption keys.

As a new key is generated for each transaction, and as the seed that is used to generate the new key is unpredictable (it may be based on the time of creating and/or executing the transaction and/or the terminal usage), a third party cannot predict what the new key will be, even if the third party knows the algorithm used to generate the new key,
20 thereby greatly reducing the possibility of fraud.

As there is no requirement for secure storage within the portable terminal, data can be uploaded to and downloaded from a personal computer (PC) without affecting the ability of the portable terminal to communicate securely with self-service terminals. This is important for portable terminals that require to synchronize their data, for example, with personal
25 computers.

In one embodiment the portable terminal may be a 3Com (trade mark) Palm IIIx (trade mark) PDA, and the SST may be an ATM having an IrDA (Infra-red Data Association) compliant infra-red port in the user interface.

Brief Description of the Drawings

These and other aspects of the invention will become apparent from the following specific description, given by way of example, with reference to the accompanying drawings, in which:

Fig 1 is a block diagram of a portable terminal according to one embodiment of the present invention;

Fig 2 is a block diagram illustrating some of the contents of a memory in the terminal of Fig 1;

Figs 3a to 3d illustrate some of the screens displayed by the portable terminal of Fig 1 during operation of the terminal;

Fig 4 is a block diagram of a transaction system comprising the portable terminal of Fig 1 in communication with a self-service terminal; and

Fig 5 is a flowchart illustrating the steps involved in communicating secure information between the terminals shown in Fig 4.

Detailed Description

Referring to Fig 1, the portable terminal 10 is a 3Com (trade mark) Palm IIIx (trade mark) PDA. PDA 10 comprises a controller 12 and associated volatile memory 14 and non-volatile memory 16, a touch-sensitive display 18, a serial communication port 20 for receiving a communication cable, and a communication port 22 in the form of an IrDA-compliant infra-red port for wireless transmission and reception of information.

The non-volatile memory 16 is FLASH EPROM and contains the BIOS for booting-up the PDA 10. The FLASH EPROM 16 also stores the applications that are pre-programmed into the PDA 10, such as a calendar application, a notepad application, and such like.

The volatile memory 14 is logically split into two parts: a dynamic heap 26 and a storage area 28.

The dynamic heap 26 is used for storing dynamic data such as global variables, system dynamic allocations (TCP/IP, IrDA, and such like), application stacks, and temporary memory allocations. The keystrokes entered into the PDA 10 are all stored in the dynamic heap 26. The dynamic heap 26 is cleared when the PDA 10 is reset.

The storage area 28 is used for data and application storage, and is analogous to disk storage in a desktop personal computer. The storage area 28 is powered by the PDA batteries (not shown) and by a large capacitor, so that the storage area 28 retains data even when the PDA 10 is reset or the batteries are replaced.

As the PDA 10 is being used, the contents of the dynamic heap 26 are constantly changing. Thus, two identical PDAs, storing identical applications, will have different contents on their respective dynamic heaps.

Referring to Fig 2, there is shown a block diagram illustrating the contents of the storage area 28. Area 28 contains account data 30 for a financial institution, an ATM program 32 for enabling a user to prepare an ATM transaction using the PDA, and an encryption program 34 for generating a new key for encrypting a prepared ATM transaction.

The account data 30 is data that is retained for use by the ATM program 32. There are no special security requirements for storing the account data 30. The account data includes details of the user's bank account number, a bank identification number, and a public key issued by the financial institution. For increased security, the public key is obtained directly from the financial institution by the PDA user attending a branch of the institution in person and downloading the public key. Updates to the public key may be obtained by secure remote downloading if the new public key has the necessary authentication, such as a certificate, digital signature, or such like.

Referring to Figs 3, in use, the ATM program 32 provides the user with a series of screens that are similar to the screens used in a typical ATM. In this embodiment, the first screen 40 requests the user to type in his/her PIN. The second screen 42 provides the user

with one or more transaction options, such as withdraw cash, print account balance, transfer funds, and such like. Subsequent screens will depend on the transaction option selected. If the withdraw cash option is selected, the third screen will invite the user to enter the amount to be withdrawn.

5 Once the transaction details have been entered, the ATM program 32 displays a screen 44 for prompting the user to enter a transaction lifetime. This lifetime determines how long the transaction will remain valid for: that is, the latest time by which the transaction must be executed.

10 Once the lifetime has been entered, the ATM program 32 displays an icon 46 to remind the PDA user that a transaction is awaiting execution. The user (or a trusted third party) then conveys the PDA 10 to an ATM, as described with reference to Fig 4.

15 Fig 4 is a block diagram of a transaction system 50 comprising a PDA 10 in communication with a self-service terminal in the form of an ATM 52. ATM 52 has a communication interface 54 in the form of an IR to electrical signal converter. ATM 52 also has a conventional user interface 56 (which may be a touchscreen, a keypad, a loudspeaker and microphone interface, or such like) to allow a user to input transaction details manually.

When at ATM 52, the user of the PDA 10 aligns the IR port 22 with IR converter 54 located in the ATM 52 and selects the 'Execute transaction' icon 46 on the display 18.

20 Fig 5 illustrates the steps involved in communicating secure information between PDA 10 and ATM 52.

On detecting (step 100) selection of icon 46, the controller 12 invokes the encryption program 34 (Fig 2) to ensure secure communication between the PDA 10 and the ATM 52.

25 The encryption program 34 generates a new key for this transaction by obtaining a seed, and then applying a hashing algorithm (step 102), in this embodiment MD5, to the seed. The seed is obtained by the program 34 reading the contents of the dynamic heap 26 (Fig 1), requesting the current date and time from the operating system, and appending the date and time settings to the read contents. In some embodiments, only a portion of the

dynamic heap 26 may be used, for example, several hundred bytes of the dynamic heap may be used.

The hashed value is then split into two halves (step 104): left and right. Two operations are then performed on the left half and the right half to generate a unique session key and a unique challenge value (step 106).

In the first operation, the left half is used as a first intermediate key and the right half is used as first intermediate data. The first intermediate key is used to encrypt the first intermediate data to produce the new key (which is a symmetric session key). In the second operation, the right half is used as a second intermediate key and the left half is used as second intermediate data. The second intermediate key is used to encrypt the second intermediate data to produce a challenge value. The intermediate keys and intermediate data are then discarded (they may be deleted or retained in memory until more memory is required). Thus, a unique key and a unique challenge value have been produced using the hashed value of the contents of the dynamic heap 26.

PDA 10 then uses the public key stored in the account data 30 (Fig 2) to encrypt the new key and challenge value (step 108). The encrypted key and challenge value are then transmitted (step 110) from IR port 22 to IR converter 54.

IR converter 54 receives the encrypted transmission and conveys the transmission to a controller 58. Controller 58 decrypts (using the private key counterpart to the public key) the encrypted transmission to recover the new (unique) session key and challenge value. Controller 58 responds to the original challenge value sent by the PDA 10 and prepares a new challenge value. Controller 58 conveys to the PDA 10 the new challenge and the original challenge using the new session key to encrypt the transmission.

PDA 10 receives (step 112) the encrypted challenges and verifies (step 114) that the ATM 52 has correctly responded to the original challenge.

If the ATM 52 has correctly responded to the original challenge then the PDA 10 responds to the ATMs challenge (step 116) and the ATM 52 verifies this response; thereafter, secure communication can take place between the PDA 10 and the ATM 52, and the

prepared transaction can be executed.

If the ATM 52 has not correctly responded to the original challenge, then the communication between the PDA 10 and the ATM 52 is terminated (step 120) and the PDA 10 requests (step 122) if the user wishes to delete the prepared transaction. If the user wishes to delete the transaction, for example to avoid a possible security violation, then the transaction is deleted (step 124). The communication is then halted (step 126) so that if the transaction is to be executed then the PDA 10 must revert to step 100 where a new session key and challenge value is generated.

Various modifications may be made to the above described embodiment within the scope of the invention, for example, the portable terminal may be a communications device such as a cellular telephone. The ATM program 32 may not use a transaction lifetime. In other embodiments, a completed transaction may be stored in the PDA in encrypted form. In other embodiments, different hashing algorithms may be used. Different methods for generating a session key and a challenge value may be used to that described above.

What is Claimed is:

1. A portable terminal for encrypting information, the portable terminal comprising:
means for generating a new key for each transaction, wherein the new key is generated using one or more properties of the portable terminal.
2. A portable terminal according to claim 1, wherein the new key is generated when the transaction is executed.
3. A portable terminal according to claim 1, wherein the one or more properties of the portable terminal include the date and time settings.
4. A terminal according to claim 1, further comprising means for generating a unique challenge in addition to the new key so that a unique challenge can be issued for each transaction.
5. A method of encrypting information in a portable terminal, the method comprising the steps of:
using one or more properties of the portable terminal to obtain a sequence of values; and
generating a new key based on the sequence of values.
6. A method according to claim 5, further comprising the step of:
generating a unique challenge value based on the sequence of values.

7. A method according to claim 5, further comprising the steps of:
 encrypting the new key and the challenge value using a public key issued by a
 host; and
 transmitting the encrypted new key and challenge value to the host.

8. A method of communicating encrypted information between a portable
 terminal and a self-service terminal, the method comprising the steps of:
 using one or more properties of the portable terminal to obtain a sequence of
 values;

generating a new key based on the sequence of values;
 generating a challenge value based on the sequence of values;
 encrypting the new key and the challenge value using a public key; and
 transmitting the encrypted key and challenge value to the self-service
 terminal.

9. A method according to claim 8, further comprising the steps of:
 generating a new challenge value at the self-service terminal;
 encrypting the generated challenge value using the new key;
 transmitting the encrypted challenge value to the portable terminal; and
 awaiting a correct response to the transmitted challenge value being
 transmitted by the portable terminal before accepting any subsequent transaction at the self-
 service terminal.

10. A transaction system comprising:
 a self-service terminal;
 a portable terminal which is operable to use one or more properties of the portable terminal for (i) obtaining a sequence of values, and (ii) generating a new key based on the sequence of values; and
 means for enabling the portable terminal and the self-service terminal to intercommunicate using the new key.

11. A method of determining if a self-service terminal is an authentic terminal, the method comprising the steps of:
 using one or more properties of a portable terminal to obtain a sequence of values;
 generating a new key based on the sequence of values;
 generating a challenge value based on the sequence of values;
 encrypting the new key and challenge value using a public key provided by an institution;
 transmitting the encrypted key and challenge to the self-service terminal;
 receiving a response from the self-service terminal, decrypting the response using the new key; and
 halting any further transmission unless the decrypted response includes a correct reply to the challenge value.

09651979-083100

PORTABLE TERMINAL

Abstract

A portable terminal (10) for encrypting information is described. The terminal (10) generates a new key for each transaction, where the new key is generated using one or more properties of the terminal (10). The one or more properties are variable and may include the history of usage of the terminal, and/or the date and time settings. The terminal (10) may generate a unique challenge in addition to the new key so that a unique challenge can be issued for each transaction. A method of encrypting information in a portable terminal, a method of communicating encrypted information between a portable terminal and a self-service terminal, and a transaction system comprising a self-service terminal (52) and a portable terminal (10) are also described.

09651979-083100

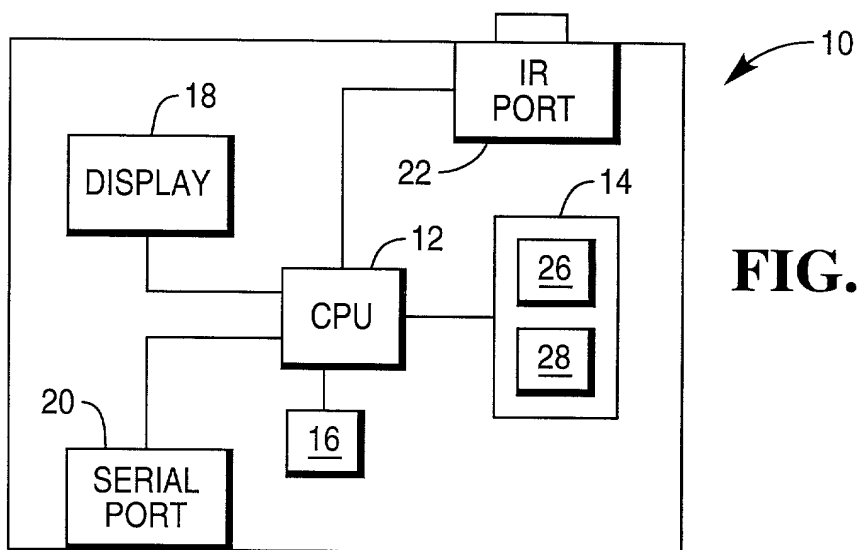


FIG. 1

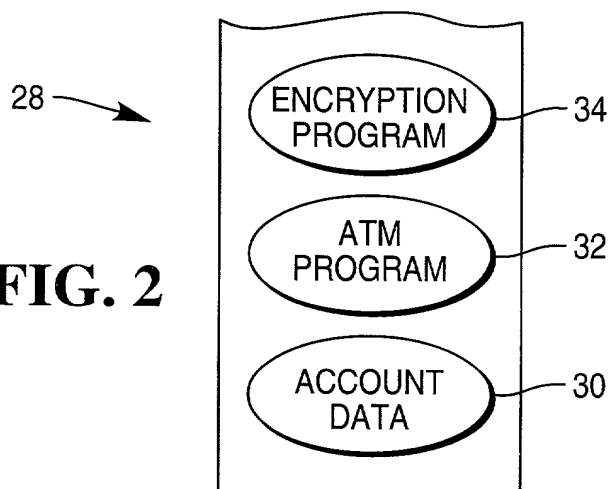


FIG. 2

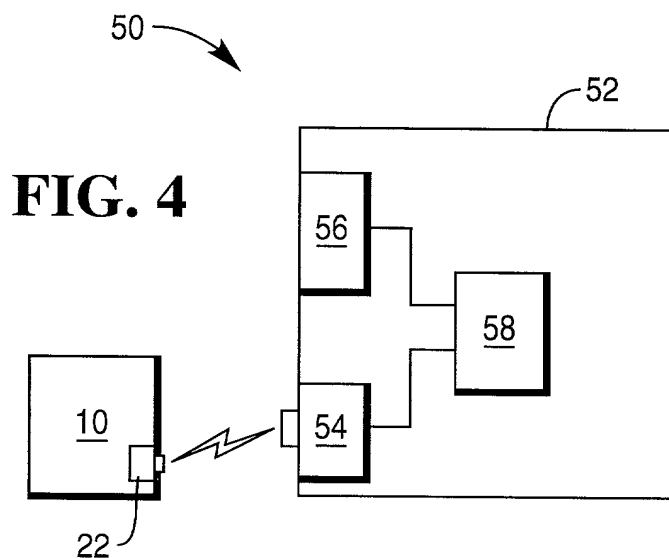


FIG. 4

FIG. 3a

40

18

WELCOME

Please enter your identification number

Detailed description: This is a rectangular screen with a double border. The top border is labeled 40. The right border is labeled 18. The screen displays the word 'WELCOME' in a large, bold, serif font. Below it, in a smaller serif font, is the text 'Please enter your identification number'. At the bottom, there is a horizontal line of five dashes '-----'.

FIG. 3b

42

18

Please Select a Transaction

- WITHDRAW CASH TRANSFER FUNDS •
- PRINT BALANCE DEPOSIT CHEQUE •

Detailed description: This is a rectangular screen with a double border. The top border is labeled 42. The right border is labeled 18. The screen displays the text 'Please Select a Transaction' in a serif font. Below this, there are two lines of text, each flanked by bullet points. The first line reads '• WITHDRAW CASH TRANSFER FUNDS •' and the second line reads '• PRINT BALANCE DEPOSIT CHEQUE •'.

FIG. 3c

44

18

Please Set Lifetime for Transaction

- 1 Week 4 Hours •
- 1 Day 1 Hour •

Detailed description: This is a rectangular screen with a double border. The top border is labeled 44. The right border is labeled 18. The screen displays the text 'Please Set Lifetime for Transaction' in a serif font. Below this, there are two lines of text, each flanked by bullet points. The first line reads '• 1 Week 4 Hours •' and the second line reads '• 1 Day 1 Hour •'.

FIG. 3d


46

18

*XTrans

Detailed description: This is a rectangular screen with a double border. The top border is labeled 46. The right border is labeled 18. The screen displays a small rectangular box in the top-left corner containing the text '*XTrans'.

FIG. 5

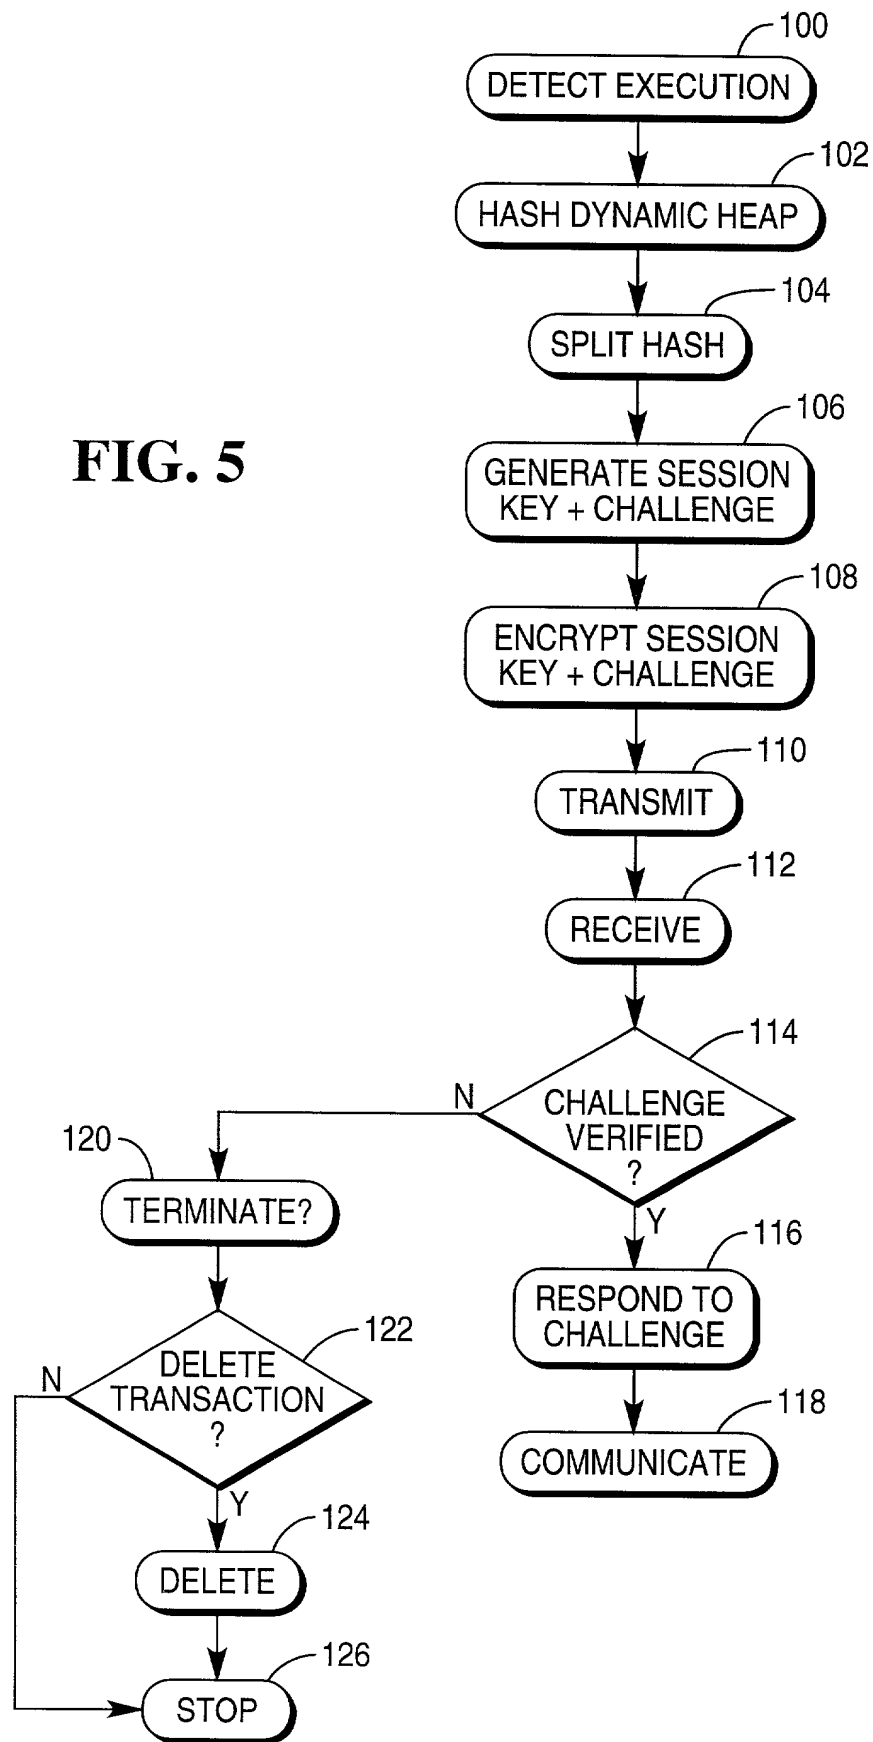

United States Patent Application

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PORTABLE TERMINAL

and identified by NCR Corporation Docket No. **8490.00**, the specification of which:

- a. ☒ is attached hereto
- b. ☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable), which I have reviewed and for which I solicit a United States patent.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT application having a filing date before that of the application on the basis of which priority is claimed:

FOREIGN APPLICATION(S), IF ANY, CLAIMING PRIORITY UNDER 35 USC § 119

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)
United Kingdom	9920502.3	1 September 1999	N/A

OTHER FOREIGN APPLICATION(S), IF ANY, FILED BEFORE THE PRIORITY APPLICATION(S)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)
	None		

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or 365(c) of any PCT international application(s) designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application

is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. PARENT APPLICATION OR PCT PARENT NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)
None		

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

U.S. PROVISIONAL APPLICATION NUMBER	DATE OF FILING (Day, Month, Year)
None	

And I hereby appoint: Michael Chan of Dayton, Ohio, Registration No. 33,663,
John D. Cowart of San Diego, California, Registration No. 38,415,
Douglas S. Foote of Dayton, Ohio, Registration No. 31,013,
Paul W. Martin of Dayton, Ohio, Registration No. 34,870,
James M. Stover of Dayton, Ohio, Registration No. 32,759, and
Charlene Stukenborg of Dayton, Ohio, Registration No. 40,832.

my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. I hereby expressly waive my right to revoke the Power of Attorney granted above. Address all telephone calls to Michael Chan at telephone number 937-445-4956.

Address all correspondence to: Michael Chan
NCR Corporation
101 West Schantz, ECD-2
Dayton, Ohio 45479-0001.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of inventor Adrian Shields

Inventor's signature Adrian Shields Date: 8-22-2000

Residence 6 Crathes Close, Glenrothes Street, Fife, United Kingdom KY7 4SS

Citizenship Great Britain

Post Office Address Same as above